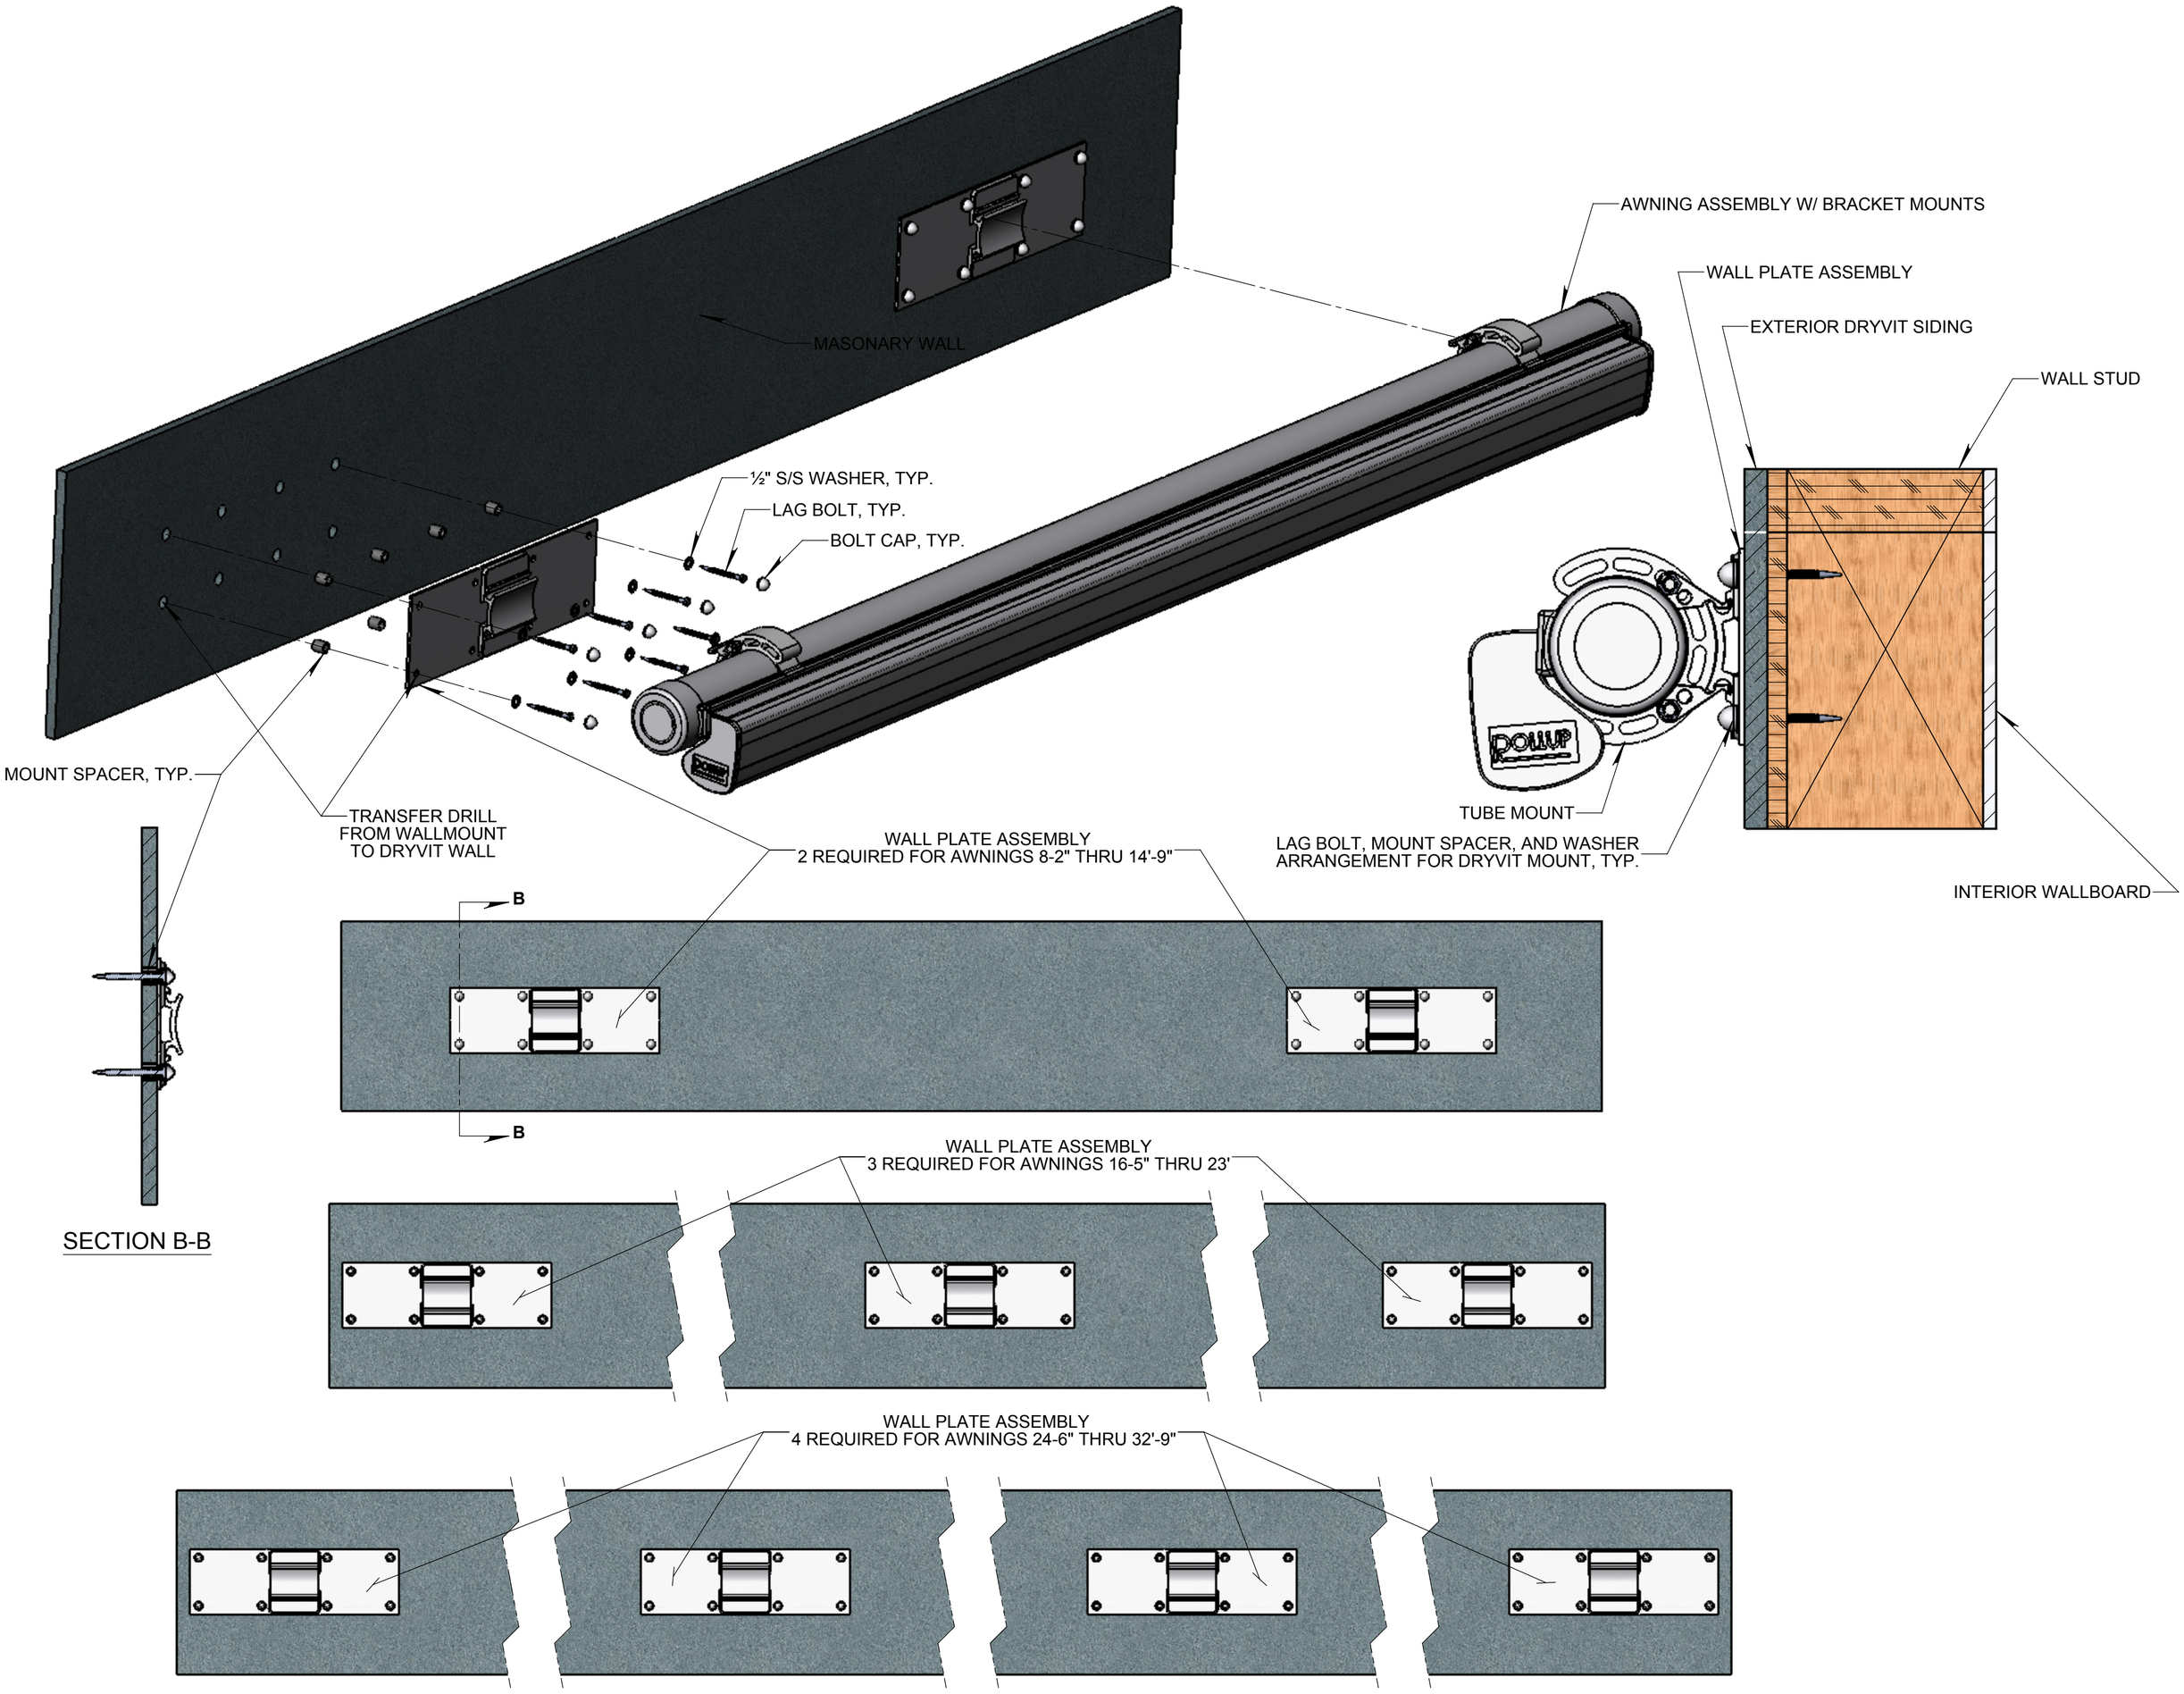DRYVIT REQUIREMENTS FOR VARIOUS AWNING LENGTHS